
Mobile unit for agricultural vehicles



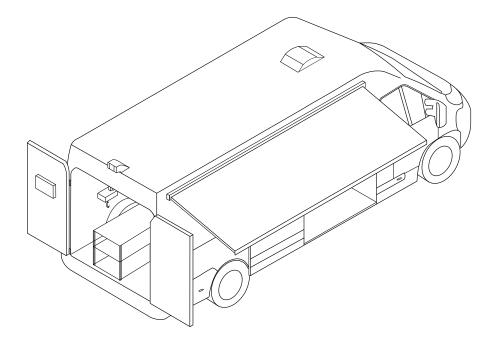

Features

- Mobile station divided into 2 sections.
- The administrative area is located at the front and access through the side door on the right side of the van, lined panels and roof with polyurethane foam white PFRV to insulate both cold and heat.
- The **technical area** is located at the rear of the van, floor finished in 15 mm Finnish board, sides covered with 1.2 mm galvanized sheet metal.
- Dividing wall in the center of the van to divide both areas with 50 mm thick sandwich panel.
- Awning on top of side door for sun protection.
- Rail on the van roof with hoist for easy loading and unloading of items to the ground.
- Interior lighting with recessed LED ceiling lights and ex terior work lihts.

Equipment incorporated in the van

- 630 mm "L" shaped worktop with three stainless steel support legs and drawer with sorter.
- 2 kW 220 V air conditioner.
- Wi-Fi router for activation via data card.
- Lombardini generator 220 V 400 V and compressor 50 liters 2 HP.
- Metalic cabinet with sliding trays.
- General electrical panel with 220 and 400 V sockets.
- Water tank and soap dispenser for hand cleaning and wastebasket.

Adaptable vehicles

Iveco Daily

Fiat Ducato

Peugueot Boxer

Citröen Jumper

Opel Movano

Renault Master

Recommended Ryme equipment

Recommended equipment



Play detector **DHA**



BrakeCheck decelerometer



Electronic Headlight tester RY-RAR



The equipment shown should be taken as a reference and is subject to change without prior notice.